


Dimensions

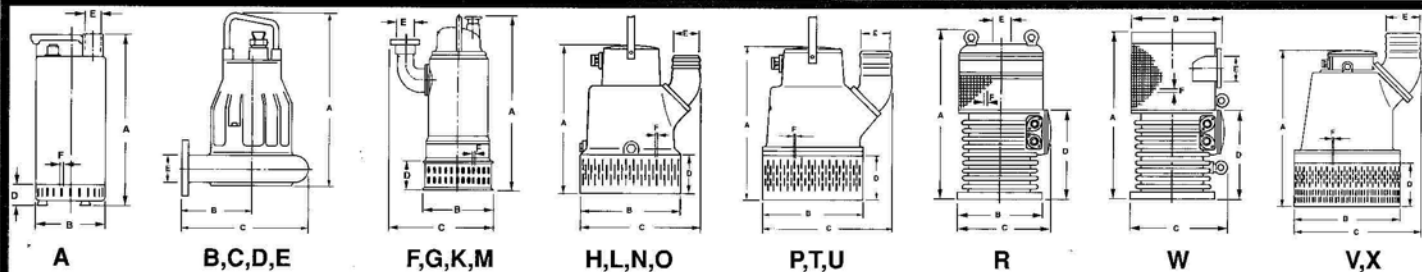

Curve No.	Pump Type	A	B	C	D	E	F	Running Amps at 380V	Weight(Kg)	
									Alum.	C. Iron
A	MSPD-1,02 M	378	153	—	45	1 ¹ / ₄	8	5 (220V)	—	SS 316 11.5
B	MSPSV-0,62 M	426	107	207	—	50	—	1.6	—	20
C	MSPSI-0,62 M	426	107	207	—	50	—	1.6	—	20
D	MSPSV-1,12 M	426	107	207	—	50	—	2.6	—	20
E	MSPSI-1,12 M	426	107	207	—	50	—	2.6	—	20
F	MSPD-2,02 M	600	235	305/330	100	50	4	3.4	27	—
G	MSPD-3,02 H	650	265	325/390	100	50/75	4	6.4	38	—
H	MSPD-3,72 H	505	335	392	150	65	6	7.3	48	96
J	MSPD-8,02 H	690	365	480	150	80	6	15	93	146
K	MSPD-3,02 M	650	265	325/390	100	50/75	4	6.4	38	—
L	MSPD-5,22 H	505	335	392	150	65	6	10.3	51	99
M	MSPD-4,02 M	720	265	380	100	100	4	10	46	—
N	MSPD-3,72 M	505	335	392	150	80	6	7.3	44	92
O	MSPD-5,22 M	505	335	392	150	80	6	10.3	47	95
P	MSPD-2002 H	745	505	640	215	100	10	37	170	320
R	MSPD-9002 H	1240	610	675	655	100	12	159	—	975
S	MSPD-8,02 M	690	365	480	150	100	6	15	84	142
T	MSPD-2002 M	745	505	640	215	150	10	37	170	320
U	MSPD-2002 L	745	505	640	215	150	10	37	170	320
V	MSPD-5404 H	1140	770	830	312	150	15	97	555	—
W	MSPD-9002 H	1240	655	775	655	150	12	159	—	890
X	MSPD-5404 M	1140	770	910	312	200/250	15	97	555	—